



DMP Electronics Inc.

8F, No 12, Wu-Guan 7 Rd., Wu Gu Industrial Park  
Wu Gu Xiang, Taipei 248, Taiwan R.O.C.  
TEL: 886 2 2298 0770 FAX: 886 2 2290 2335

# RoBoard Panel RP-089

## Manual V1.0

### The Heart of Robotics

Jul 2010

DMP Electronics Inc

ROBOARD

## ◆ Copyright

The information in this manual is subject to change without notice for continuous improvement in the product. All rights are reserved. The manufacturer assumes no responsibility for any inaccuracies that may be contained in this document. And makes no commitment to update or to keep current the information contained in this manual.

No part of this manual may be reproduced, copied, translated or transmitted, in whole or in part, in any form or by any means without the prior written permission of the DMP Electronics Inc.

©Copyright 2010 DMP Electronics Inc.  
Manual No. RP-089-01 Ver.1.00 ◆ Jul, 2010

## ◆ Trademarks Acknowledgment

Other brand names or product names appearing in this document are the properties and registered trademarks of their respective owners. All names mentioned herewith are served for identification purpose only.


## TableOfContents

Chapter 1.....	4
Introduction.....	4
1.1 Packing List.....	4
1.2 Product Description.....	5
1.3 Specifications.....	6
Chapter 2.....	7
Installation.....	7
2.1 RP-089 Outline.....	7
2.2 Connectors.....	8
2.3 Connectors & Jumpers Summary.....	9
2.4 Pin Assignments.....	10
Chapter 3.....	11
Development Note.....	11
Update VBIOS and Driver.....	11

# Chapter 1

## Introduction

### 1.1 Packing List

Product Name	Package
RP-089	8.9 Inches LCD Panel and cable
	

## 1.2 Product Description

RoBoard Panel RP-089 is a color active matrix thin film transistor (TFT) liquid crystal display (LCD). The RP-089 is composed of a TFT LCD panel, a driving circuit and a back light system. RP-089 Panel has a 8.9 (17:10) inch diagonally measured active display area with WSVGA (1024 horizontal by 600 vertical pixel) resolution.

ROBoard


### 1.3 Specifications

	RP-089
Outline Dimension	213.36 x 129.55 x 5.15 mm (Typ.)
Display Area	195.072 (H) x 113.4 (V) mm
Number of Pixel	1024 RGP (H) x 600 (V)
Back-light	Single LED (Side-Light type)
Power Consumption	Logic System 1.0W (Max)
	B/L System 2.7W (MAX)
Power input	DC +5V via USB connector

# Chapter 2

## Installation

### 2.1 RP-089 Outline

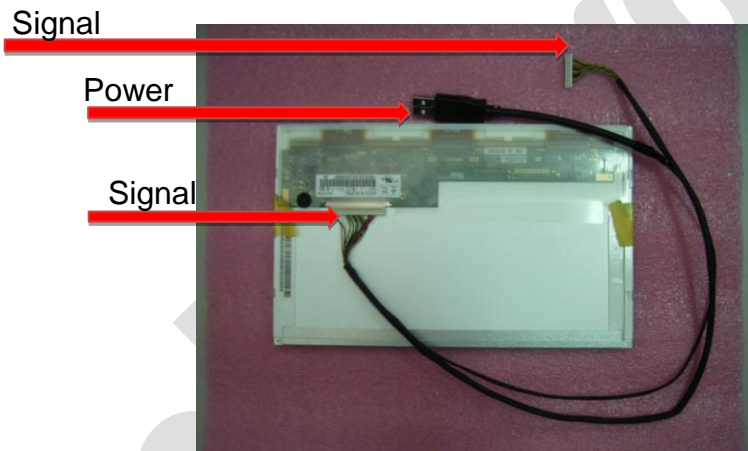

## 2.2 Connectors

### Connectors



## 2.3 Connectors & Jumpers Summary

Summary Table

	Description	Type of Connections	Pin
<b>J1</b>	Signal connector to MiniPCI VGA LVDS	Wafer, 1.54mm	15-pin
<b>J2</b>	Power input (DC +5V)	USB	
<b>J3</b>	Input Signal connector	Wafer, 1.0mm	30-pin

## 2.4 Pin Assignments

Wafer 30Pin -- Pitch 1.0 mm	Signal	Wafer 15Pin Pitch - 1.25mm
Pin From LCD Panel		Pin for MiniPCI-VGA
1	GND	6
2	VDD	2
3	VDD	NC
4	VDD	NC
5	ADJ	1
6	CLK EDID	NC
7	DATA EDID	NC
8	RXIN0-	4
9	RXIN0+	3
10	GND	5
11	RXIN1-	8
12	RXIN1+	7
13	GND	9
14	RXIN2-	12
15	RXIN2+	11
16	GND	10
17	RXCLKIN-	15
18	RXCLKIN+	14
19	GND	NC
20	NC	NC
21	NC	NC
22	GND	13
23	GND	<b>USB Pin 4</b>
24	VCC	<b>USB Pin 1</b>
25	VCC	<b>USB Pin 1</b>
26	VCC	<b>USB Pin 1</b>
27	NC	NC
28	NC	NC
29	NC	NC
30	NC	NC

# Chapter 3

## Development Note

### Update VBIOS and Driver

The RP-089 provides VBIOS and Driver code.

Please download from official website: <http://www.roboard.com>

## Warranty

This product is warranted to be in good working order for a period of one year from the date of purchase. Should this product fail to be in good working order at any time during this period, we will, at our option, replace or repair it at no additional charge except as set forth in the following terms. This warranty does not apply to products damaged by misuse, modifications, accident or disaster. Vendor assumes no liability for any damages, lost profits, lost savings or any other incidental or consequential damage resulting from the use, misuse of, originality to use this product. Vendor will not be liable for any claim made by any other related party. Return authorization must be obtained from the vendor before returned merchandise will be accepted. Authorization can be obtained by calling or faxing the vendor and requesting a Return Merchandise Authorization (RMA) number. Returned goods should always be accompanied by a clear problem description.